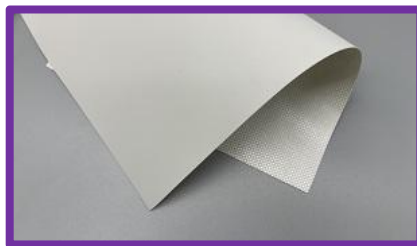


PVC TARPAULIN FOR TENT 1000D*1000D 20*20 550GSM SINGLE SIDE LAMINATED**Features**

- Single side laminated
- Excellent tensile strength, tear resistance, extremely soft hand feeling
- Waterproof, flame retardant, Anti-UV, Anti-Bacterial, Anti-Mildew, Oil resistant
- Strong and durable, not easy to wear

Product Overview**Technical Data Sheet**

Item Code		PTTFGY1020550S	Test Method
Base Fabric		1000D*1000D 20*20	DIN EN ISO2060
Weight (GSM)		550	DIN EN ISO2286-2
Tensile Strength	Warp (N/5cm)	1800	DIN53354
	Weft (N/5cm)	1800	DIN53354
Tear Strength	Warp (N/5cm)	280	DIN53363
	Weft (N/5cm)	250	DIN53363
Peeling Strength	Warp (N/5cm)	120	DIN53357
	Weft (N/5cm)	110	DIN53357
Temperature		-30°C/+70°C	
Flame Retardant (Optional)		B1/M1/M2/NFPA701	
Lacquering (Optional)		Acrylic/ PVDF	
Special Treatment (Optional)		Anti-Wicking/Anti-UV/Anti-Aging/Cold Resistant/Osmosis Prevention/Mildew Resistant	

Information contained in this document is based on our general experience and is given in good faith. But we are unable to accept responsibility in respect to factors which are outside our knowledge or control.



Add: Room 912, No.3 Building, Shangdong Business Center, Haizhou District,
Haining, Zhejiang, China
Tel: +86-573-80776996 Fax: +86-573-80776998
Mob/Skype/Wechat/WhatsApp: +86-15858322153
<mailto:contact@hncomax.com> <https://www.hncomax.com>

